



SOLAR POWER SYSTEM

MODEL: SPS20



DATASHEET

document version 1.0

Description

The SensMax solar power system SPS20 is designed to provide a reliable and sustainable power source for the SensMax TAC-B sensors and other compatible SensMax devices. It utilizes solar energy to generate electricity and ensures continuous operation of the connected equipment even in remote or off-grid locations.

The SensMax solar power system SPS20 is an all-in-one solution that integrates all the necessary components into a single package. This includes the solar panel, charge controller and battery. The compact design and integration of these components into a single system make it convenient and space-efficient.


The components are pre-wired and ready to be connected, minimizing the need for technical expertise.

Technical Specification

Model name	SPS20
Max output load	20W
Output voltage	DC 10...14.6V
Output connector	DC5521 angle 90° (compatible with SensMax TAC-B sensors)
Solar panel	Solar Cell 156Mono Optimum operating Current 3.33A Short Circuit Voltage 3.66 Open Circuit Voltage 21.24V Power 60W Size 680*510*35mm Front Glass Thickness 3.2mm Tolerance Watts ±3% Surface Max Load Capacity 60m/s (5kg / sq.m) Allowable Hail Load 23m/s,7.53g Cell Efficiency 21.60% Water proof IP67
Battery	Battery Type LiFePO4 Nominal capacity 20 Ah Electricity 256 Wh Nominal voltage 12.8 V Cycle Life >2000 times
Temperature range	-20°C to +65°C (charging and discharging operations)
Waterproof	IP67
Dimensions	Solar panel size 680*510*35mm Battery size 205*100*40mm
Weight	14 kg (whole system)

SensMax solar power system components

- **Solar panel**
The high-quality solar panel capture sunlight and convert it into electrical energy.
- **Smart Charging Controller**
The charging controller regulates charging process and ensures that the battery connected to the system is charged optimally. It prevents overcharging or deep discharging of the battery, thereby prolonging its lifespan.
- **Battery**
A high-quality LiFePO4 rechargeable battery stores the electricity generated by the solar panels during the day for later use, such as during nighttime or periods of low sunlight. The battery provides a stable power supply to the SensMax TAC-B sensor, ensuring uninterrupted operation.
- **Mounting System**
The solar panels are mounted on a durable and adjustable mounting system to maximize sun exposure and optimize energy generation. The mounting system ensures that the panels are securely fixed in place and properly angled to receive the maximum amount of sunlight throughout the day.
- **Wiring and Connectors**
The various components of the SensMax solar power system are connected using appropriate wiring and connectors. The wiring transfers the electricity between the solar panels, charge controller, battery, and other components, ensuring efficient energy flow and system functionality.

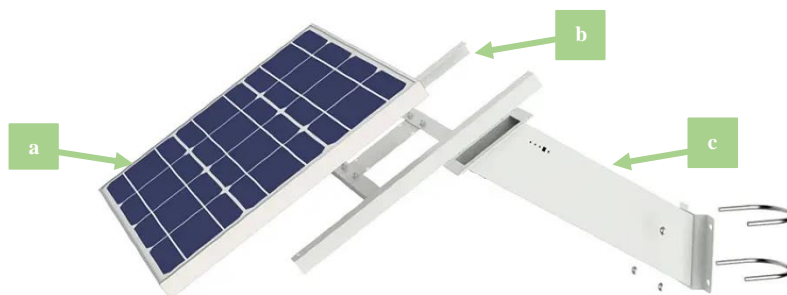

- | |
|---|
| <ul style="list-style-type: none">a. Solar panelb. Mounting systemc. Mounting bracket with built-in battery and charging controller |
|---|

Useful Information

1. Solar energy is given first priority to power the load. If there is enough solar power available, it also charges the battery. When solar energy is not sufficient to power the load, the battery takes over and supplies power simultaneously.
2. If the battery is fully discharged, it may require up to 1 hour of sunlight exposure before the system will power the load again.
3. Full battery charging time from the sun is about 6 hours.
The battery charging rate is calculated using the formula:
$$E = 60W * 0.7 * SUNSHINE_HOURS$$
Where E is the energy of a Wh
4. The SensMax TAC-B sensor uses about 3-4 Wh of energy, depending on the model. Therefore, with the SPS20 solar system, the TAC-B sensor can be powered for approximately 64-85 hours without sunlight.

SensMax[®]
Sense your business

+371 67553110

office@sensmax.lv

www.sensmax.eu

t.me/sensmax

www.facebook.com/sensmaxmanufacturer

www.linkedin.com/company/sensmax

SensMax is a registered trademark. SensMax reserves the right to make changes without further notice to any products herein. Information contained in this publication regarding device applications and the like is provided only for your convenience. SensMax disclaims all liability arising from this information and its use. Use of SensMax devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless SensMax from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any SensMax intellectual property rights.